
# EcoCup \*\*\* creates vacuum without AIR!

Great for pick-and-place applications of flat, rigid, non-porous parts including: plastic, glass, solar panels, and electronics, as well as other consumer goods with smooth, flat surfaces.

### The EcoCup<sup>™</sup> features:

- Light-switch operation
- Ultra-fast actuation
- Noise-free operation
- Easy installation and setup
- Reduced maintenance costs
- Easy optional mounting to Scara robots
- Eliminated risk of air-borne contaminants

and tested to over 5 million cycles.

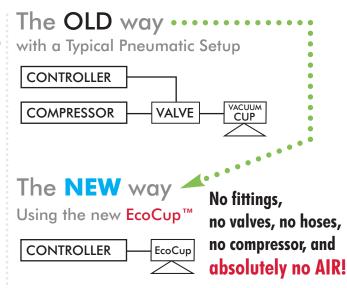


#### **EcoCup™ EC40** Electric Vacuum Cup Assembly



Patent Pending


Specifications	VC-EC40-45N
Actuation Time	25 ms
Temperature Range	5° ~ 60°C [41° ~ 140°F]
Duty Cycle	50% (½ On, ½ Off)
Voltage	24 VDC
Current	0.5 Amp
Weight	0.12 kg [0.25 lb]
Cup Material	45 Durometer Nitrile



M12 4-PIN (MALE) **CONNECTOR FACE VIEW** 

1: NOT USED 2: NOT USED 3: -0 VDC

4: +24 VDC

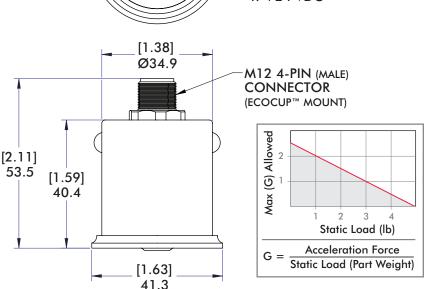

**EcoCup™ EC40** Electric Vacuum Cup - Operation

Holding Capacity	VC-EC40-45N
Recommended Load	<0.45kg [1.0 lb]

Loads from 0.45kg [1.0 lb] up to 1.81kg [4.0 lb] max. may be used with longer movement times. (See chart in drawing area for greater detail).

#### **Operating Instructions:**

- 1. Set cup on smooth, flat surface of part.
- 2. Apply 24VDC to Pins 3 and 4 on M12 connector. (Center of cup lifts, creating vacuum)
- 3. Release voltage and part is released.




M8 3-PIN (MALE)

CONNECTOR FACE VIEW 1: NOT USED 3: -0 VDC

4: +24 VDC

## **EcoCup™ EC40** Optional Scara Robot Mounting Plate

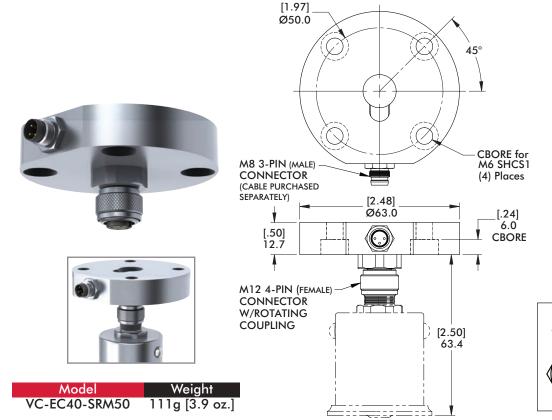

[1.00] 25.4 **EcoCup™ EC40** Optional Apple Core Mounting [1.00] [.50] Ø12.7 25.4 [2.08] 53.0 [.50] 12.7 [.25] 6.4 Shown with DE-STA-CO Weight Model MSA Series Swivel Arm 40g [1.4 oz.] VC-EC40-ACM50

